


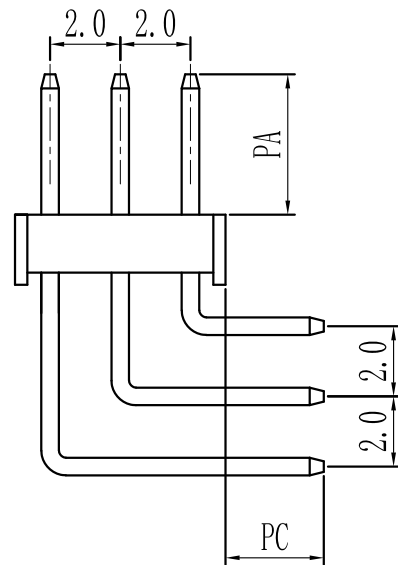


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

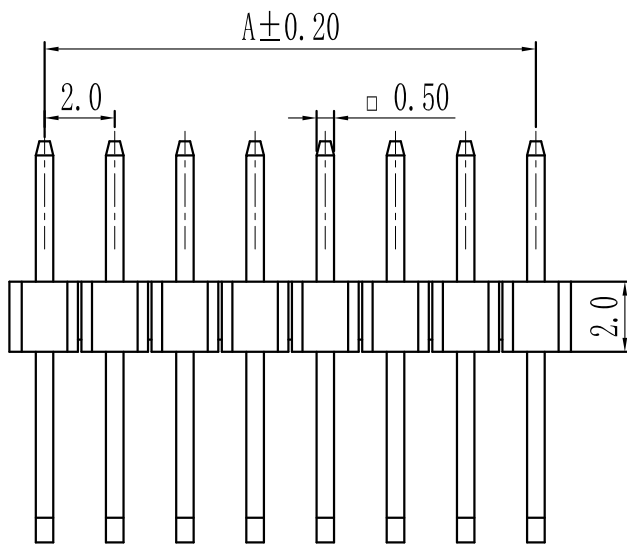

Specification:  
 Current Rating : 2AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PBT/PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

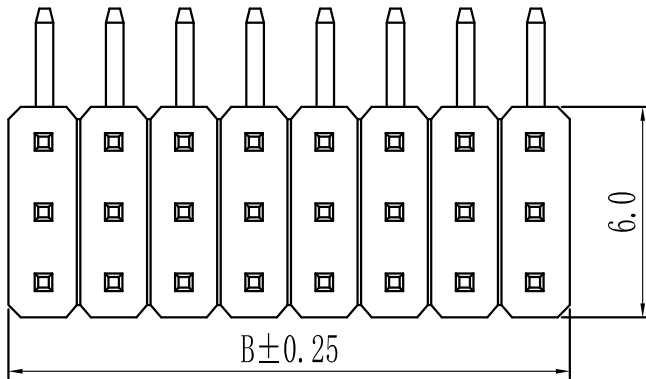

Pin数	尺寸A	尺寸B
3×1	-	2.0
3×2	2.0	4.0
3×3	4.0	6.0
3×4	6.0	8.0
3×5	8.0	10.0
3×6	10.0	12.0
3×7	12.0	14.0
3×8	14.0	16.0
3×9	16.0	18.0
3×10	18.0	20.0
3×11	20.0	22.0
3×12	22.0	24.0
3×13	24.0	26.0
3×14	26.0	28.0
3×15	28.0	30.0
3×16	30.0	32.0
3×17	32.0	34.0
3×18	34.0	36.0
3×19	36.0	38.0
3×20	38.0	40.0
3×21	40.0	42.0
3×22	42.0	44.0
3×23	44.0	46.0
3×24	46.0	48.0
3×25	48.0	50.0
3×26	50.0	52.0
3×27	52.0	54.0
3×28	54.0	56.0
3×29	56.0	58.0
3×30	58.0	60.0
3×31	60.0	62.0
3×32	62.0	64.0
3×33	64.0	66.0
3×34	66.0	68.0
3×35	68.0	70.0
3×36	70.0	72.0
3×37	72.0	74.0
3×38	74.0	76.0
3×39	76.0	78.0
3×40	78.0	80.0
3×41	80.0	82.0
3×42	82.0	84.0
3×43	84.0	86.0
3×44	86.0	88.0
3×45	88.0	90.0
3×46	90.0	92.0
3×47	92.0	94.0
3×48	94.0	96.0
3×49	96.0	98.0
3×50	98.0	100.0
3×51	100.0	102.0
3×52	102.0	104.0

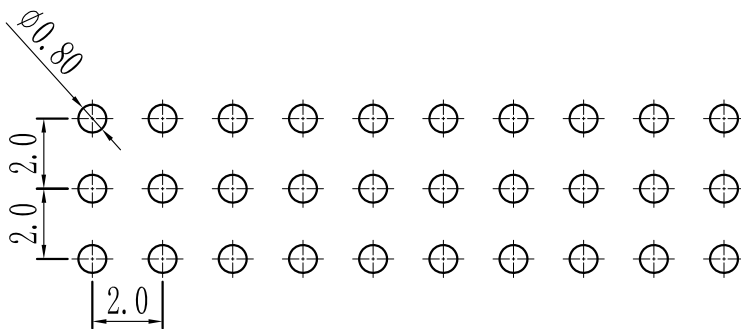

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司地址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-PH-200-0067	
	LINEAR	ANGLES						APPROVED
UNIT: MM	0.0 ± 0.30	X° REF ± 6°	DESIGNER			TITLE:	DWG. NO:	
SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN	肖坤权	2017.06.16	Pitch 2.00mm Pin Header, Single Plastic, Triple Row, Right Angle Type	REV: A0	SHEET: 1/1