
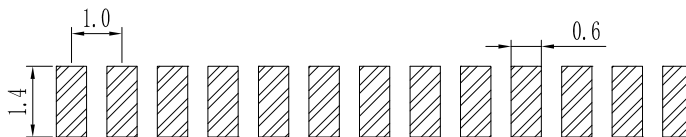

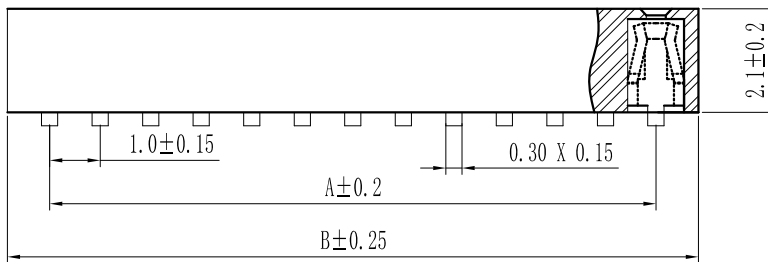

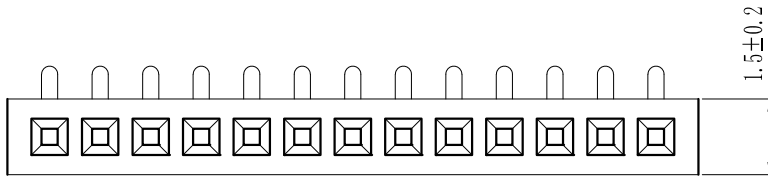


仅供参考

|      |                 |            |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE       |
| A0   | 新图面发行           | 2017.06.16 |

Specification:  
 Current Rating : 1AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PBT/PA6T/LCP  
 Contact: Bronze  
 Plating : Au or Sn Over 50u" Ni

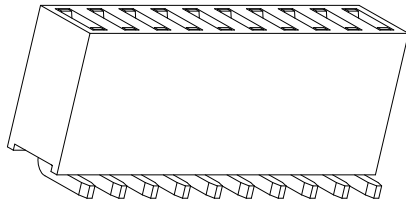

PCB LAYOUT

| Pin数 | 尺寸A   | 尺寸B   |
|------|-------|-------|
| 1x2  | 1.00  | 2.40  |
| 1x3  | 2.00  | 3.40  |
| 1x4  | 3.00  | 4.40  |
| 1x5  | 4.00  | 5.40  |
| 1x6  | 5.00  | 6.40  |
| 1x7  | 6.00  | 7.40  |
| 1x8  | 7.00  | 8.40  |
| 1x9  | 8.00  | 9.40  |
| 1x10 | 9.00  | 10.40 |
| 1x11 | 10.00 | 11.40 |
| 1x12 | 11.00 | 12.40 |
| 1x13 | 12.00 | 13.40 |
| 1x14 | 13.00 | 14.40 |
| 1x15 | 14.00 | 15.40 |
| 1x16 | 15.00 | 16.40 |
| 1x17 | 16.00 | 17.40 |
| 1x18 | 17.00 | 18.40 |
| 1x19 | 18.00 | 19.40 |
| 1x20 | 19.00 | 20.40 |
| 1x21 | 20.00 | 21.40 |
| 1x22 | 21.00 | 22.40 |
| 1x23 | 22.00 | 23.40 |
| 1x24 | 23.00 | 24.40 |
| 1x25 | 24.00 | 25.40 |
| 1x26 | 25.00 | 26.40 |
| 1x27 | 26.00 | 27.40 |
| 1x28 | 27.00 | 28.40 |
| 1x29 | 28.00 | 29.40 |
| 1x30 | 29.00 | 30.40 |
| 1x31 | 30.00 | 31.40 |
| 1x32 | 31.00 | 32.40 |
| 1x33 | 32.00 | 33.40 |
| 1x34 | 33.00 | 34.40 |
| 1x35 | 34.00 | 35.40 |
| 1x36 | 35.00 | 36.40 |
| 1x37 | 36.00 | 37.40 |
| 1x38 | 37.00 | 38.40 |
| 1x39 | 38.00 | 39.40 |
| 1x40 | 39.00 | 40.40 |
| 1x41 | 40.00 | 41.40 |
| 1x42 | 41.00 | 42.40 |
| 1x43 | 42.00 | 43.40 |
| 1x44 | 43.00 | 44.40 |
| 1x45 | 44.00 | 45.40 |
| 1x46 | 45.00 | 46.40 |
| 1x47 | 46.00 | 47.40 |
| 1x48 | 47.00 | 48.40 |
| 1x49 | 48.00 | 49.40 |
| 1x50 | 49.00 | 50.40 |

|          |                    |           |               |   |         |  |                             |
|----------|--------------------|-----------|---------------|---|---------|--|-----------------------------|
|          | GENERAL TOLERANCES |           | SCALE:<br>1:1 | NAME  | DATE    | 深圳市思拓展电子有限公司<br>SHENZHEN SINOTOP ELECTRONICS CO.,LTD<br>公司网址: www.szsituo.cn      公司电话: 0755-23765350<br>邮 箱: 2850175982@qq.com      公司传真: 0755-23765341 | PART. NO:<br>ST-FH-100-0006 |
|          | LINEAR             | ANGLES    |               |   |         |  | APPROVED                    |
| UNIT: MM | 0.0±0.30           | X° REF±6° | DESIGNER      | TITLE:<br>Pitch1.00mm Female Header, Single Row,<br>Plastic Height 2.1mm, SMT Type(U) | REV: A0 | SHEET: 1/1   |                             |
| SIZE: A4 | 0.000±0.10         | X° X'±2°  | DRAWN<br>肖坤权  | 2017.06.16  |         |  |                             |