







仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16



**主要技术参数 Main Specifications**

- 线数 (Poles): 02 to 20
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 100M\Omega$
- 额定电压 (Rated voltage): 30V AC DC
- 额定电流 (Rated current): 0.5A AC DC
- 耐电压 (Withstand Voltage): 200V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$
- 适用电线 (Applicable Wire): AWG#32

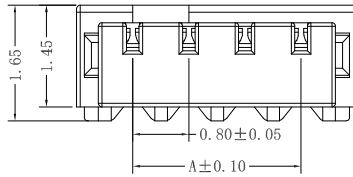

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2	0.80	2.40	12	8.80	10.40
3	1.60	3.20	13	9.60	11.20
4	2.40	4.00	14	10.40	12.00
5	3.20	4.80	15	11.20	12.80
6	4.00	5.60	16	12.00	13.60
7	4.80	6.40	17	12.80	14.40
8	5.60	7.20	18	13.60	15.20
9	6.40	8.00	19	14.40	16.00
10	7.20	8.80	20	15.20	16.80
11	8.00	9.60			

B	Terminal	2~20 PCS	Phosphor bronze	Sn /Gold
A	PEDESTAL	1 PCS	PA66	UL 90-V0 COLOR:WHITE
ITFM	COMPONENT	0*TY	MATERIAL	FINISH

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>深圳市思拓展电子有限公司</b> SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szstuo.cn    公司电话: 0755-23765350 邮 箱: 2850175982@qq.com    公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES	APPROVED				ST-WF-080-001Y	
	0.0 ± 0.30	X° REF ± 6°	DESIGNER				DWG. NO:	
	UNIT: MM	0.00 ± 0.20	X° ± 3°	DRAWN	肖坤权		2017.06.16	REV: A0    SHEET: 1/1
SIZE: A4	0.000 ± 0.10	X° X' ± 2°	TITLE:		0.8mm PITCH HOUSING			