
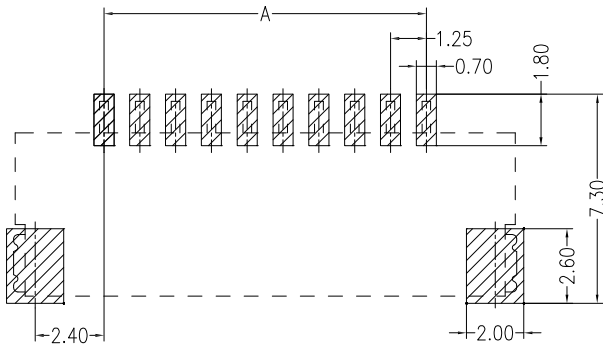




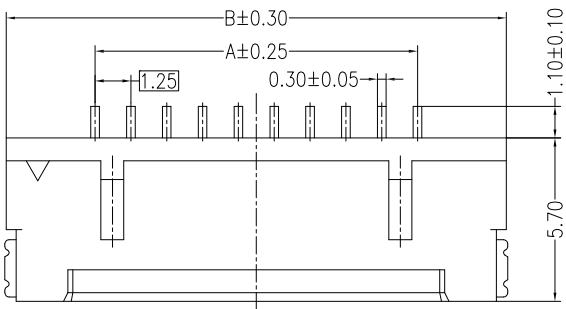



仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Poles: 2 to 30
 Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 500M\Omega$
 Rated voltage: 150V AC DC
 Rated current: 1A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA6T UL94V-0, Natural
 Contacts: Brass/ MATTE Sn-plated
 Solder tabs: Brass/MATTE Sn-plated

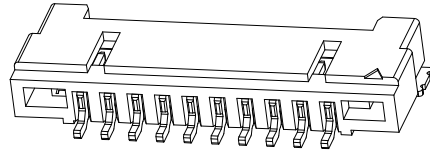

PCB LAYOUT(Tolerance: ± 0.05)

PIN	DIM A	DIM B	PIN	DIM A	DIM B
*2P	1.25	7.45	12P	13.75	19.95
*3P	2.50	8.70	13P	15.00	21.20
*4P	3.75	9.95	14P	16.25	22.45
*5P	5.00	11.20	*15P	17.50	23.70
6P	6.25	12.45	*20P	23.75	29.95
7P	7.50	13.70	21P	25.00	31.20
8P	8.75	14.95	*25P	30.00	36.20
9P	10.00	16.20	*30P	36.25	42.45
*10P	11.25	17.45			
11P	12.50	18.70			

8	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:
	LINEAR	ANGLES	APPROVED				ST-WF-125-009AWR
	0.0 \pm 0.30	X° REF $\pm 6^{\circ}$	DESIGNER				DWG. NO:
	UNIT: MM	0.00 \pm 0.20	X° $\pm 3^{\circ}$	DRAWN	肖坤权		2017.06.16
SIZE: A4	0.000 \pm 0.10	X° X' $\pm 2^{\circ}$				TITLE: 1.25mm PITCH 90° WAFER SMT TYPE	