
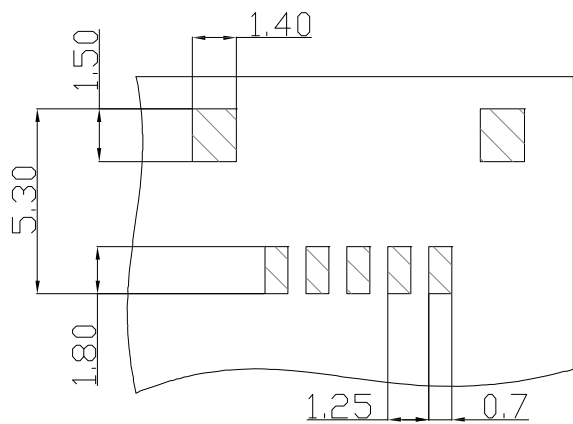


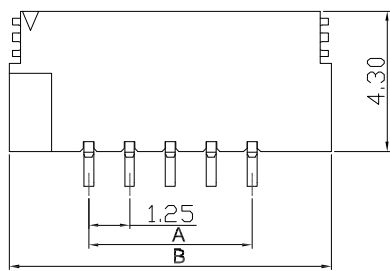


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

主要技术参数 Main Specifications

线数 (Poles): 02 to 30
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 125 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$



P. C. B LAYOUT

Poles	Dimensions mm	
	A	B
2	1.25	6.10
3	2.50	7.35
4	3.75	8.60
5	5.00	9.85
6	6.25	11.10
7	7.50	12.35
8	8.75	13.60
9	10.00	14.85
10	11.25	16.10
11	12.50	17.35
12	13.75	18.60
--	--	--
30	36.25	41.10

3	焊片	磷青铜	2	镀金
2	插针	磷青铜	N	镀金
1	基座	PA9T GN2330	1	
序号	名称	材料	数量	附注

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES	APPROVED				ST-WF-125-002AWB	
	0.0±0.30	X° REF±6°	DESIGNER				DWG. NO:	
UNIT: MM	0.00±0.20	X° ±3°	DESIGNER			TITLE:	REV: A0	SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	1. 2.5mm PITCH 90° WAFER SMT TYPE		