



仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

主要技术参数 Main Specifications




线数 (Poles): 08 to 40
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

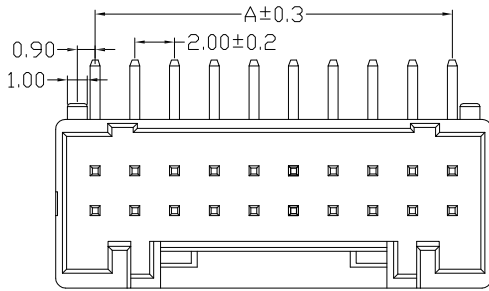


8P~10P




12P~18P

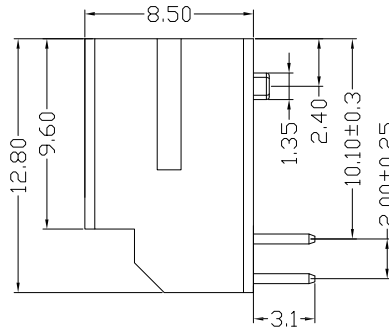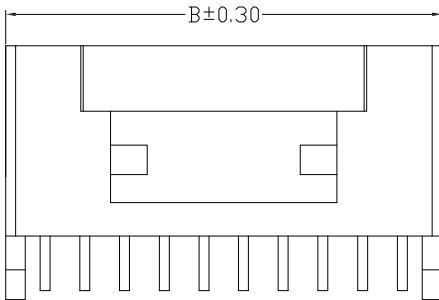

20P~40P



8P~10P Without Guideway
12P~40P With Guideway
Scale:1/0.4

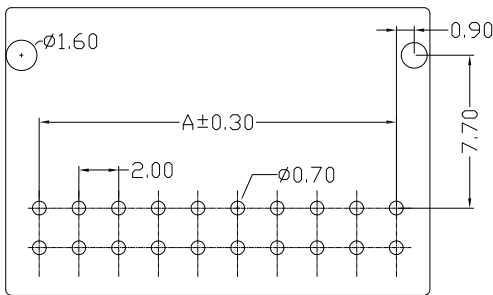

P.C.B LAYOUT

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*04	6.00	10.00	2*13	24.00	28.00
2*05	8.00	12.00	2*14	26.00	30.00
2*06	10.00	14.00	2*15	28.00	32.00
2*07	12.00	16.00	2*16	30.00	34.00
2*08	14.00	18.00	2*17	32.00	36.00
2*09	16.00	20.00	2*18	34.00	38.00
2*10	18.00	22.00	2*19	36.00	40.00
2*11	20.00	24.00	2*20	38.00	42.00
2*12	22.00	26.00			

B	CONTACT	n PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA66 Natural	UL 94V-0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:
	LINEAR	ANGLES	APPROVED				ST-WF-200-006AW
	0.0±0.30	X° REF±6°	DESIGNER				DWG. NO:
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16
SIZE: A4	0.000±0.10	X° X'±2°				TITLE: 2.00mmPITCH 90° WAFER DIP TYPE	

A B C D E F G H